

Installation Instructions

PVC and Steel-Galvanized Application

Conversion Grip Rings For IPS Applications !

The revolutionary FloPlast "PVC and Multi Purpose Conversion Grip Rings" convert PE pipe fittings into convertible fittings for **PVC, Steel, Lead, Copper, Galvanized and Stainless** applications.


The superior 2200 lbs of pullout resistance of the grip ring with a fitting rating of 232 PSI translates into more reliable and longer lasting connections for all applications.

Use with any FloPlast IPS fitting




Steel-Galvanized Grip Ring

or



PVC Grip Ring

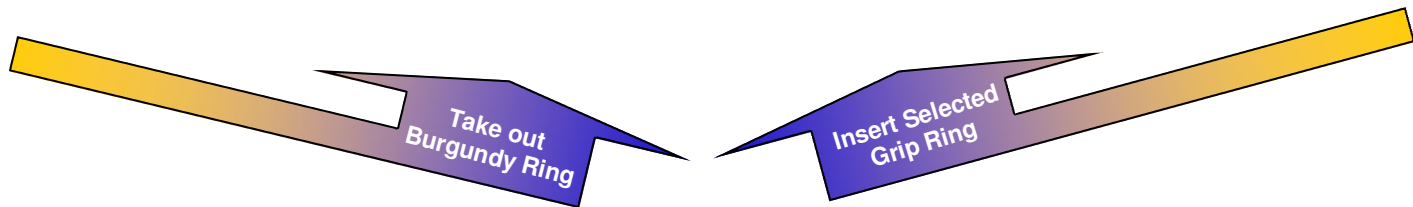

- Step
1
- Step
2
- Step
3

- **Important:** Re-assemble parts of fitting in this order:
- Compression Nut
- **Grip-ring (remove BURGUNDY Grip Ring; REPLACE WITH WHITE PVC or Grey Multi Purpose GRIP RING)**
- Compression ring (ensure the taper on ring faces toward the insert point)
- O-ring
- Install fitting according to instructions for various sizes.
- 1/2" to 2" sizes—Follow "Small Size" Fitting Instructions
- 3" - 4" sizes: Follow "Large Size" Fitting Instructions
- **Save Time and Money** using FloPlast Compression Fittings and our Various application Grip Rings!



P.O. Box 529
Muenster, TX 76252
Phone: 940-825-3300
Fax: 940-825-4075
www.floplastfits.com